



CHUCK

高速中实强力卡盘(安装便利)


N-A 系列

对应主轴先端头装载后背板 中实标准卡盘



标准卡盘


外形图

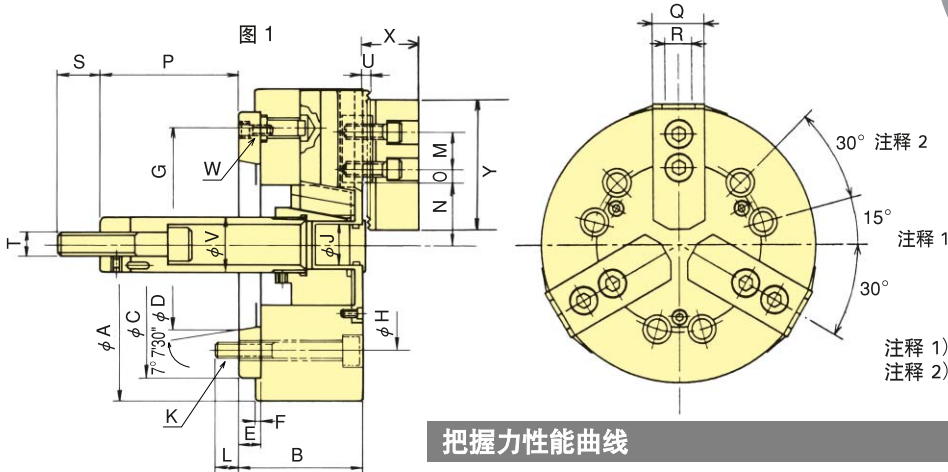

注释 1) N-21, 24 : 0°
注释 2) N-21, 24 : 60°

把握力性能曲线

※曲线表示的是在使用标准软爪的情况下。

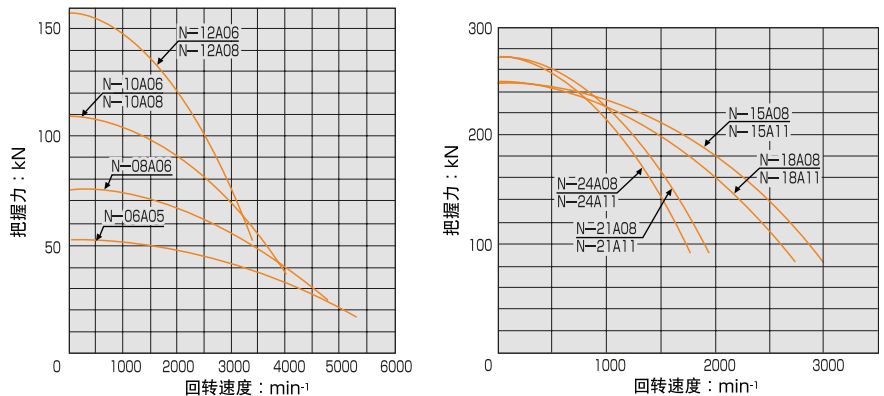

外形尺寸

※N-10A06, N-12A06, N-15A08, N-18A08, N-21A08, N-21A11, N-24A11 请参考图 2。 ※N-21A08 - N-24A15 的安装螺孔 P.C.D. : 60° 节距 : 6件

型号	A		C	D	E	F	G	H	J	K	L	M	N		O		P		Q	R	S	T	U	V	W	X	Y	
	最大	最小											最大	最小	最大	最小												
N-06A05	165	84	140	82.5	63	15	5	116	104.8	21	6-M10	14	20	37.8	33.55	13.75	7.75	86.5	66.5	31	12	36	M16x20	4	34	3-M6	35	72
N-08A06	210	97	170	106.375	17	5	150	133.4	25	6-M12	18	25	46.3	41.9	22.25	11.75	110	89	35	14	36	M20x2.5	5	38	3-M6	42	95	
N-10A06	254	104	220	106.375	20	5	171.4	133.4	34	6-M12	18	30	51.1	46.7	30.75	11.25	114	89	40	16	36	M20x2.5	5	45	6-M16	46	110	
N-10A08	254	102	220	139.719	18	5	190	171.4	34	6-M16	25	30	51.1	46.7	30.75	11.25	140	115	40	16	36	M20x2.5	5	45	3-M8	46	110	
N-12A06	304	120	220	106.375	20	6	171.4	133.4	34	6-M12	18	30	61	55.75	48.75	12.75	119	89	50	18	36	M20x2.5	5	50	6-M16	54	129	
N-12A08	304	118	220	139.719	18	6	190	171.4	34	6-M16	25	30	61	55.75	48.75	12.75	145	115	50	18	36	M20x2.5	5	50	3-M8	54	129	
N-15A08	381	130	300	139.719	22	6	235.0	171.4	-	6-M16	23	43	77.5	69.5	48.75	23.25	82	47	50	25.5	55	M30x3.5	2	60	6-M20	61	135	
N-15A11	381	130	300	196.869	22	6	260	235.0	-	6-M20	33	43	77.5	69.5	48.75	23.25	82	47	50	25.5	55	M30x3.5	2	60	3-M10	61	135	
N-18A08	450	130	300	139.719	22	6	235.0	171.4	-	6-M16	23	43	108	100	48.75	23.25	70	35	50	25.5	55	M30x3.5	2	60	6-M20	61	135	
N-18A11	450	130	300	196.869	22	6	260	235.0	-	6-M20	33	43	108	100	48.75	23.25	70	35	50	25.5	55	M30x3.5	2	60	3-M10	61	135	
N-21A08	530	146	380	139.719	27	6	330.2	171.4	-	6-M16	23	60	86	78	93.5	27.5	70	35	65	25	55	M30x3.5	3	60	6-M22	71	180	
N-21A11	530	146	380	196.869	27	6	330.2	235.0	-	6-M20	28	60	86	78	93.5	27.5	70	35	65	25	55	M30x3.5	3	60	6-M22	71	180	
N-21A15	530	146	380	285.775	27	6	330.2	330.2	-	6-M22	34	60	86	78	93.5	27.5	70	35	65	25	55	M30x3.5	3	60	3-M12	71	180	
N-24A11	610	146	380	196.869	27	6	330.2	235.0	-	6-M20	28	60	125	117	93.5	27.5	70	35	65	25	55	M30x3.5	3	60	6-M22	71	180	
N-24A15	610	146	380	285.775	27	6	330.2	330.2	-	6-M22	34	60	125	117	93.5	27.5	70	35	65	25	55	M30x3.5	3	60	3-M12	71	180	

技术规格

※由实际测试数据获得容许最高转速。

型号	把握范围 mm		爪行程(直径) mm	活塞行程 mm	容许最大入力 kN(kgf)	最大静止把握力 kN(kgf)	容许最高回转速度 min⁻¹(r.p.m)	重量 kg	转动惯量 kg·m²	配置油缸		最大压力 MPa(kgf/cm²)	配置硬爪	配置软爪	主轴头尺寸
	最大	最小								压缩	空气				
N-06A05	165	19	8.5	20	18.0(1835)	52.5(5353)	5270	14.0	0.050	Y1020R	AY1720R	260(265)	HB06B1	SB06B1	A2-5
N-08A06	210	23	8.8	21	25.0(2549)	75.0(7648)	4760	27.0	0.148	Y1225R	AY2225R	250(255)	HB08A1	SB08B1	A2-6
N-10A06	254	24	8.8	25	29.0(2957)	108.0(11013)	4010	40.0	0.335	Y1225R	AY2225R	280(286)	HB10A1	SB10B1	A2-6
N-10A08	254	24	8.8	25	29.0(2957)	108.0(11013)	4010	40.0	0.328	Y1225R	AY2225R	280(286)	HB10A1	SB10B1	A2-8
N-12A06	304	26	10.5	30	41.0(4181)	156.0(15907)	3380	67.0	0.760	Y1530R	-	270(275)	HB12B1	SB12A1	A2-6
N-12A08	304	26	10.5	30	41.0(4181)	156.0(15907)	3380	66.0	0.753	Y1530R	-	270(275)	HB12B1	SB12A1	A2-8
N-15A08	381	72	16	35	82.0(8362)	249.0(25391)	3040	105.0	1.950	Y2035R	-	320(326)	HB15N1	SB15N1	A2-8
N-15A11	381	72	16	35	82.0(8362)	249.0(25391)	3040	103.0	1.875	Y2035R	-	320(326)	HB15N1	SB15N1	A2-11
N-18A08	450	133	16	35	82.0(8362)	249.0(25391)	2710	134.0	2.475	Y2035R	-	320(326)	HB15N1	SB15N1	A2-8
N-18A11	450	133	16	35	82.0(8362)	249.0(25391)	2710	131.0	2.425	Y2035R	-	320(326)	HB15N1	SB15N1	A2-11
N-21A08	530	62	16	35	82.0(8362)	273.0(27838)	1940	201.0	5.175	Y2035R	-	320(326)	HB18B2	SB18A2	A2-8
N-21A11	530	62	16	35	82.0(8362)	273.0(27838)	1940	198.0	5.125	Y2035R	-	320(326)	HB18B2	SB18A2	A2-11
N-21A15	530	62	16	35	82.0(8362)	273.0(27838)	1940	190.0	4.975	Y2035R	-	320(326)	HB18B2	SB18A2	A2-15
N-24A11	610	152	16	35	82.0(8362)	273.0(27838)	1760	241.0	7.375	Y2035R	-	320(326)	HB18B2	SB18A2	A2-11
N-24A15	610	152	16	35	82.0(8362)	273.0(27838)	1760	234.0	7.050	Y2035R	-	320(326)	HB18B2	SB18A2	A2-15